

**Espacenet****Bibliographic data: EP2815053 (A1) — 2014-12-24**

---

**GATE****Inventor(s):** HONEYCUTT ROBERT W [US]; JONES CARSON ALLAN [US] ±  
(HONEYCUTT, ROBERT W, ; JONES, CARSON ALLAN)**Applicant(s):** SAFERACK LLC [US] ± (SAFERACK, LLC)**Classification:** - international: ***E06B11/00; E06B11/02; E06B11/08***  
- cooperative: ***E05D7/0009; E05D7/0415; E05F1/1207; E06B11/00;  
E06B11/022; E06B11/04; E06B11/045; E06B11/085*****Application number:** EP20130749657 20130215**Priority number(s):** US201261599276P 20120215 ; WO2013US26306 20130215**Also published as:** EP2815053 (A4) WO2013123302 (A1) US2015252605 (A1)  
US2013219790 (A1) US9032666 (B2) more**Abstract not available for EP2815053 (A1)****Abstract of corresponding document: WO2013123302 (A1)**

A gate may include a first supporting arm and an adjustable arm. The first supporting arm may include an interior surface and an interior cavity. The adjustable arm may include an insertable end, an adjustable compression member and a compression fitting. The insertable end may be configured to be inserted into the interior cavity of the first supporting arm. The adjustable compression member may be disposed at the insertable end. The compressing fitting may be configured to adjust the adjustable compression member. When the insertable end is inserted into the interior cavity of the first supporting arm, the adjustable compression member is adjusted to compress against the interior surface so that the adjustable arm is fixed relative to the first supporting arm.

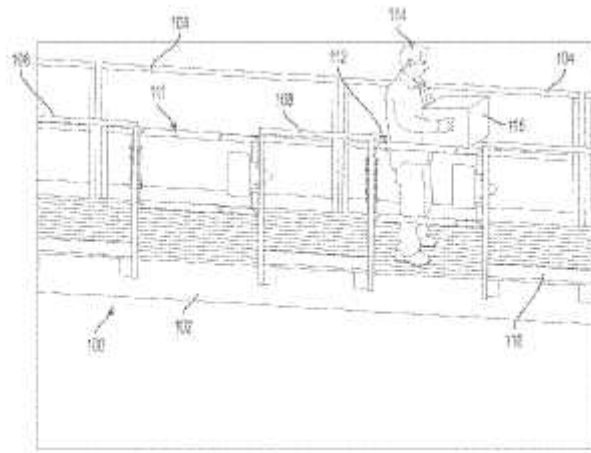


FIG. 1A

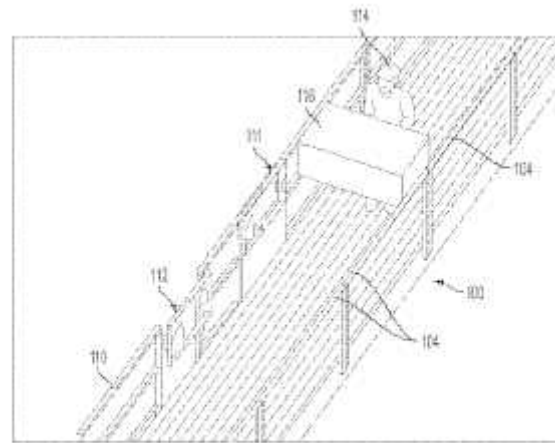


FIG. 1B